


Búvónyílás felső kerek 608 mm kifelenyíló

mod.600/P

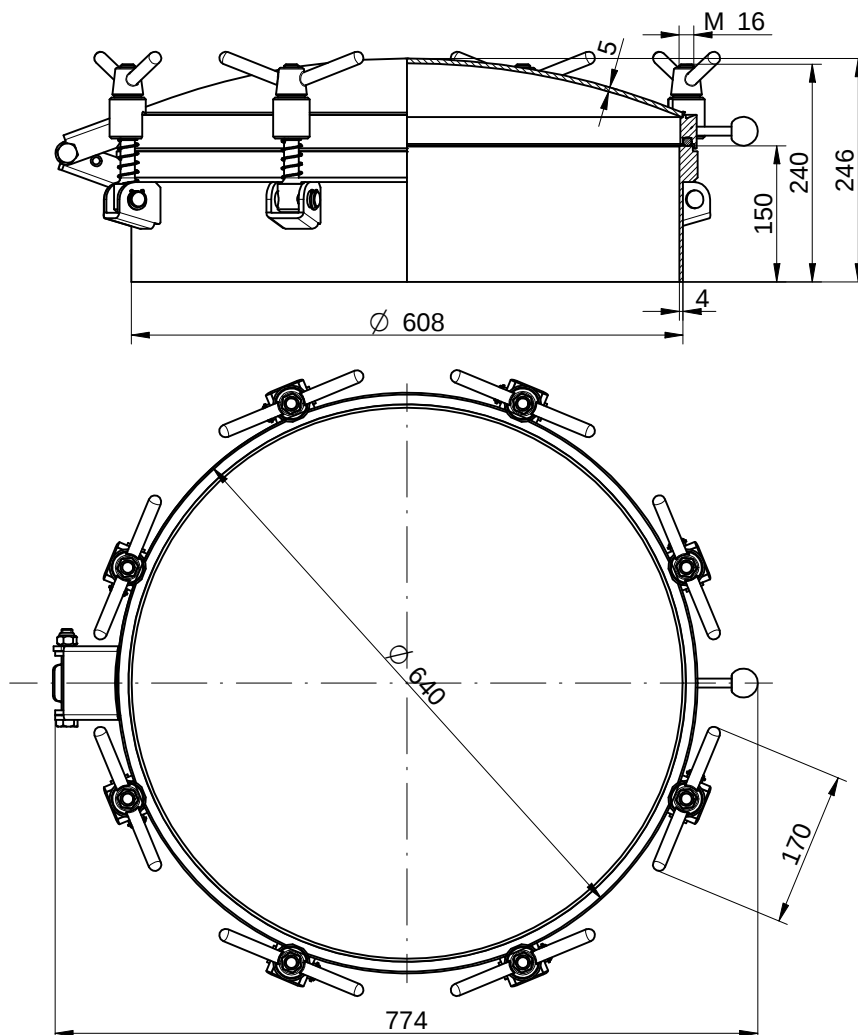

Mod.	N° Tekerők	P. max (bar)	T.min C° / T.max C°	Súly (Kg)
600P	6	-1 / 2,1	-15° / 100°	50,0
	6	-1 / 1,8	-15° / 150°	
	6	-1 / 1,5	-15° / 200°	
	8	-1 / 2,9	-15° / 100°	50,5
	8	-1 / 2,9	-15° / 150°	
	8	-1 / 2,8	-15° / 200°	
	10	-1 / 3,7	-15° / 100°	51,0
	10	-1 / 3,4	-15° / 150°	
	10	-1 / 3,1	-15° / 200°	
	12	-1 / 4,2	-15° / 100°	51,5
	12	-1 / 3,9	-15° / 150°	
	12	-1 / 3,7	-15° / 200°	
	14	-1 / 4,2	-15° / 100°	52,0
	14	-1 / 3,9	-15° / 150°	
	14	-1 / 3,7	-15° / 200°	

Anyag: AISI 304L-14307
AISI 316L-14404 /B típus pl. 600/P/B