

Kerek búvónyílás periférikus zárakkal


Round manhole with peripheral closings
Runde Klapptür mit Spannvorrichtungen

mod. **6028 A**

Visszatartásmentes fedél

Retention free cover
Freie Entleerung Deckel


AISI 304/L - 316/L

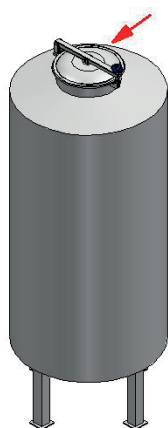

- Kragen - Frame - **Keret** 1 MR
Deckel - Cover - **Fedél** 2 MR
Dichtung - Gasket- **Tömítés** 3
Handgriff - Handwheel - **Zárótekerő** 4
Arm - Arm - **Kar** 5

MOD.	DN	Di	A	B	C	D	E	N° 4	P.max bar	Vacuum bar
6028 A2	200	200	2	2	80	125	245	3	0.1	-0.5
6028 A3	300	300	2	2	80	125	345	4	0.1	-0.5
6028 A4	400	400	2	2	80	125	439	4	0.1	-0.5
6028 A5	500	500	2	2	80	125	544	5	0.05	-0.5
6028 A6	600	598	2	2	80	125	640	6	0.05	-0.3

P.Max : Maximális üzemi nyomás -20°C / +50°C-ig
Maximum working pressure to -20°C / +50°C

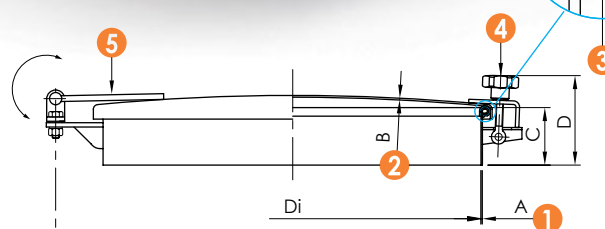

Függőleges/vízszintes nyitás
Vertical/horizontal opening

