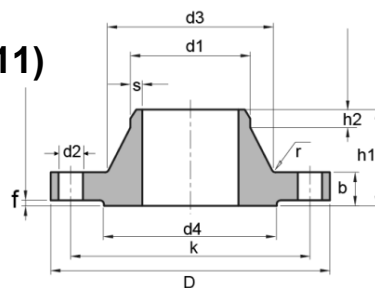


Hegtdatos karima (új szabvány EN1092-11) PN16, rozsdamentes, ipari


Mod.DIN2633

DN	d1 (mm)	D (mm)	b (mm)	k (mm)	d2 (mm)	Csav. száma (db)	h1 (mm)	d3 (mm)	d4 (mm)	f (mm)	Súly (kg)	s (mm)	h2 (mm)
10	14	90	14	60	14	4	35	25	40	2	0,580	1,8	6
10	17,2	90	14	60	14	4	35	28	40	2	0,580	1,8	6
15	20	95	14	65	14	4	35	30	45	2	0,648	2,0	6
15	21,3	95	14	65	14	4	35	32	45	2	0,648	2,0	6
20	25	105	16	75	14	4	38	38	58	2	0,952	2,3	6
20	26,9	105	16	75	14	4	38	40	58	2	0,952	2,3	6
25	30	115	16	85	14	4	38	42	68	2	1,140	2,6	6
25	33,7	115	16	85	14	4	38	45	68	2	1,140	2,6	6
32	38	140	16	100	18	4	40	52	78	2	1,690	2,6	6
32	42,4	140	16	100	18	4	40	56	78	2	1,690	2,6	6
40	44,5	150	16	110	18	4	42	60	88	3	1,860	2,6	7
40	48,3	150	16	110	18	4	42	64	88	3	1,860	2,6	7
50	57	165	18	125	18	4	45	72	102	3	2,530	2,9	8
50	60,3	165	18	125	18	4	45	75	102	3	2,530	2,9	8
65	76,1	185	18	145	18	4	45	90	122	3	3,060	2,9	9
80	88,9	200	20	160	18	4	50	105	138	3	3,700	3,2	10
100	108	220	20	180	18	4	52	125	162	3	4,620	3,6	10
100	114,3	220	20	180	18	4	52	131	162	3	4,620	3,6	10
125	133	250	22	210	18	8	55	150	188	3	6,300	4	10
125	139,7	250	22	210	18	8	55	156	188	3	6,300	4	10
150	159	285	22	240	22	8	55	175	218	3	5,150	4,5	12
150	168,3	285	22	240	22	8	55	184	218	3	5,150	4,5	12
200	219,1	340	24	295	22	12	62	235	268	3	11,000	5,9	16
250	267	405	26	355	26	12	70	285	320	3	15,600	6,3	16
250	273	405	26	355	26	12	70	292	320	3	15,600	6,3	16
300	323,9	460	28	410	26	12	78	344	378	4	22,000	7,1	16
350	355,6	520	30	470	26	16	82	390	438	4	28,8	8	16
350	368	520	30	470	26	16	82	390	438	4	31,2	8	16
400	406,4	580	32	525	30	16	85	445	490	4	36,3	8	16
400	419	580	32	525	30	16	85	445	490	4	39,3	8	16
500	508	715	34	650	33	20	90	548	610	4	61,0	8	16
600	610	840	36	770	36	20	95	652	725	5	75,4	8,8	18
700	711	910	36	840	36	24	100	755	795	5	77,0	8,8	18
800	813	1025	38	950	39	24	105	855	900	5	101,0	10	20
900	914	1125	40	1050	39	28	110	955	1000	5	122,0	10	20
1000	1016	1255	42	1170	42	28	120	1058	1115	5	162,0	10	22
1200	1220	1485	48	1390	48	32	130	1262	1330	5	243,0	12,5	30
1400	1420	1685	52	1590	48	36	145	1465	1530	5	323,0	14,2	30
1600	1620	1930	58	1820	56	40	160	1668	1750	5	479,0	16	35