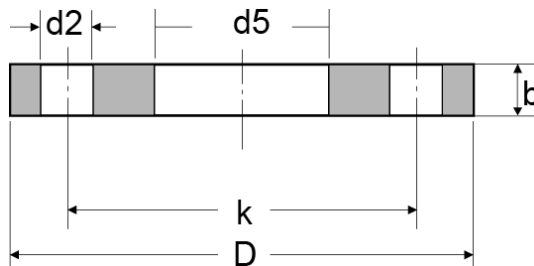


Laposkarima, (új szabvány EN1092-1) PN06 rozsdamentes, ipari

Mod.DIN 2573


DN	d1 (mm)	d5 (mm)	D (mm)	b (mm)	k (mm)	d2 (mm)	Csav. száma (db)	Csav. méret	Csav. furat d~2 (mm)	Súly (kg)
10	14	14,5	75	12	50	11	4	M10	11	0,363
10	17,2	17,7	75	12	50	11	4	M10	11	0,363
15	20	21	80	12	55	11	4	M10	11	0,410
15	21,3	22	80	12	55	11	4	M10	11	0,410
20	25	26	90	14	65	11	4	M10	11	0,600
20	26,9	27,6	90	14	65	11	4	M10	11	0,600
25	30	31	100	14	75	11	4	M10	11	0,740
25	33,7	34,4	100	14	75	11	4	M10	11	0,740
32	38	39	120	16	90	14	4	M12	14	1,130
32	42,4	43,1	120	16	90	14	4	M12	14	1,130
40	44,5	45,5	130	16	100	14	4	M12	14	1,390
40	48,3	49	130	16	100	14	4	M12	14	1,390
50	57	58,1	140	16	110	14	4	M12	14	1,530
50	60,3	61,1	140	16	110	14	4	M12	14	1,530
65	76,1	77,1	160	16	130	14	4	M12	14	1,890
80	88,9	90,3	190	18	150	18	4	m16	18	2,980
100	108	109,6	210	18	170	18	4	M16	18	3,460
100	114,3	115,9	210	18	170	18	4	M16	18	3,460
125	133	134,8	240	20	200	18	8	M16	18	4,600
125	139,7	141,6	240	20	200	18	8	M16	18	4,600
150	159	161,1	265	20	225	18	8	M16	18	5,220
150	168,3	170,5	265	20	225	18	8	M16	18	5,220
200	219,1	221,8	320	22	280	18	8	M16	18	7,150
250	267	270,2	375	24	335	18	12	M16	18	9,610
250	273	276,2	375	24	335	18	12	M16	18	9,610
300	323,9	327,6	440	24	395	22	12	M20	22	12,600
350	355,6	372,2	490	26	445	22	12	M20	22	15,600
350	368	359,7	490	26	445	22	12	M20	22	15,600
400	406,4	423,7	540	28	495	22	16	M20	22	18,400
400	419	411,0	540	28	495	22	16	M20	22	18,400
450	457	462,3	595	30	550	22	16	M20	22	21,400
500	508	513,6	645	30	600	22	20	M20	22	24,600